



RÖCKA

DESCRIPTION: Steps **TEXTURE:** Natural stone (Fossil stone)

PALLET OVERVIEW - 48"



PALLET OVERVIEW - 60"







NOTES

Röcka 48″ is a double-sided step. Each side has slight natural texture differences. Please take that into consideration when installing them side by side. We recommend keeping the same texture together.

Please note that there is a slight vertical angle on the front and back faces of the step 3/8", from the bottom to the top of the step.


To achieve a natural appearance, product dimensions can vary $\pm \frac{3}{16}''$ (5 mm) for height and $\pm \frac{1}{2}''$ (13 mm) for length and width.

*For an authentic look, each color option is composed of a variety of darker & lighter tones. Natural ingredients such as granite are present within the recipe to allow for a range in tones, veining and textures from one stone to another.

	Spe	cifications per pallet	Imperi	Imperial		Metric	
	48" DOUBLE-SIDED	Cubing	8 uni	ts	8 unit	ts	
		Linear coverage per pallet	32 lin	. ft	9.76	lin. m	
		Approx. Weight	2 770	2 770 lbs		1 256 kg	
		Number of rows	4				
		Linear coverage per row	8 lin.	ft/row	2.44 lin. m/row		
			imensions	in	mm	Units/pallet	
		H A	Height	6	152	8 units	
			Depth 1	14 %	378		
经有	E Material		Depth 2	14 1/8	359		
		Marin Marin	Length	48	1 219		

Spe	cifications per pallet	Imperial	Metric
"09	Cubing	2 units	2 units
	Linear coverage per pallet	10 lin. ft/pal	3.05 lin. m/pal
	Approx. Weight	1 020 lbs	463 kg
	Number of rows	1	

D2	Unit dimensions	in	mm	Units/pallet						
H A	Height	6	152	2 units						
	Depth 1	15 1/4	387							
	Depth 2	14 %	371							
With Minimal Control	Length	60	1 524							
Control of the second	Nin and a second									
	MAN									
		A STATE OF THE PARTY OF THE PAR								



RÖCKA

WALL & EDGE


When building a staircase, the Röcka wall can be used to complete the sides and act as part of a structural system. See the product specifications on page 227.



INSTALLATION GUIDE

STEPS

RÖCKA

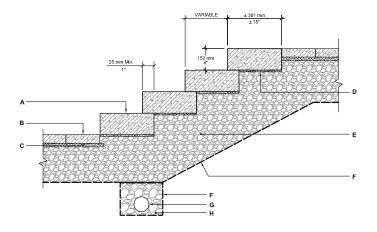

- A. RÖCKA STEP UNIT
- B. TECHO-BLOC CONCRETE PAVER
- C. SETTING BED 1" (25 mm) THICK
- **D.** SETTING BED ½" (12 mm) MAX. TO COMPACT (AS REQUIRED FOR ALIGNMENT)
- **E.** COMPACTED GRANULAR BASE 0-3/4" (0-20 mm) THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS
- F. GEOTEXTILE
- **G.** PERFORATED DRAIN 4" (100 mm) DIA. CONNECTED TO SERVICES
- **H.** CLEAN STONE 3/4" (20 mm)