


# Ledgestone<sup>™</sup> Steps



1-800-UNILOCK | UNILOCK.COM

# **LEDGESTONE<sup>™</sup> STEPS STONEMARK**<sup>®</sup>

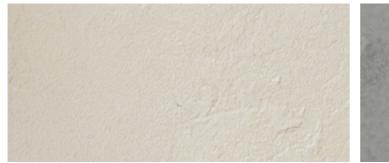

BUFF

GREY

# **PRODUCT ATTRIBUTES**

Visual Appearance	Look and feel of Natural Stone.
Finish	Smooth top with Rock-face edges.

# **PRODUCT SPECIFICATIONS**





24 x 72 x 6" 610 x 1830 x 150mm

## **TECHNICAL INFORMATION**

#### ASTM C 1372 Standard Specifications for Dry-Cast Segmental **Retaining Wall Units**

Conforms to:

48" STEP

24 x 48 x 6"

610 x 1220 x 150mm

- C140 for Absorption and Compressive Strength > 3000 PSI
- C1262 for Freeze Thaw Durability <1% mass loss
- C1372 Overall dimensional variations permissable for width, height and length +/- 1/8" (+/-3.2mm)

#### Unilock standards exceed 8,000 PSI for Ledgestone products with:

- 4% absorption avg.
- 5% absorption max.
- Dimensional Accuracy +/- 5/64" (+/-2.00mm)
- Test results available upon request

### **PRODUCT DATA**



#### LEED INFORMATION Materials & Resources: LEED V4:

Building Product Disclosure and Optimization

Sourcing of Raw Materials - Sourcing of Raw Materials and Extraction • 1 point Sourcing of Raw Materials - Leadership Extraction Practices • 1 point Material Ingredient Reporting - Material Ingredient Reporting • 1 point Material Ingredient Reporting - Material Ingredient Optimization • 1 point Environmental Product Declaration • 1 point

	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
Stones & Bundling	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Coping & 24 x 24 Pillar Cap - Georgetown Manufacturing										
Step - 48" x 24"			12.00	4.000	3				574	1,721
Step - 72" x 24"			18.00	6.000	3				860	2,581

Notes: Ledgestone Steps are sold in full bundles and on a refundable skid/Ledgestone Coping and 24"x24" Pillar Caps are sold on a non-refundable skid. All sales of this product are final and non-refundable. All measurements are nominal. Contact your Unilock Territory Manager or call 1-800-UNILOCK for further information. \*For custom options, please contact your Unilock Territory Manager.